

## LOOKING FOR TOP-TIER TILE FLOORING IN ADELAIDE?

At SA Tiles and Decor, we're more than just a tile store – we're your local design partner. Whether you're renovating or starting from scratch, we bring premium materials, expert advice, and a deep understanding of style trends to every project. Walk into our warehouse and experience quality that lasts.

### PRODUCTS & FLOORING OPTIONS

- ✓ Premium Wall & Floor Tiles
- ✓ SPC & Hybrid Flooring
- ✓ Full Range of Installation Accessories  
(grouts, adhesives, trims & more)
- ✓ Skirting & Finishing Profiles

### WE OFFER

- ✓ Site Measurements & Free Quotes
- ✓ Fast & Reliable Delivery
- ✓ Trade & Bulk Discounts Available



+61 410 008 366  
+61 433 573 366



[www.satilesanddecor.com.au](http://www.satilesanddecor.com.au)



[sales@satilesanddecor.com.au](mailto:sales@satilesanddecor.com.au)



[/satilesanddecor](https://www.facebook.com/satilesanddecor)



1A/392 Martins Road,  
Green Fields SA 5107

# GOLD ENDLESS COLLECTION

2026



**SA** TILES  
AND  
DECOR  
EXCELLENCE IN TILING & BATHWARE





# **GOLD ENDLESS COLLECTION 2026**





# *Gold Endless*

**600 X 1200 MM**

Redefine your space with  
incredible designs that exude  
multiple tones of space.




# TECHNICAL FEATURES




## APPLICATION AREAS



Reception



Kitchen




Living  
Room



Salon  
& Spa




Offices



Restaurants  
& Hotels



Bathroom



Showrooms

*The Various That Make Up The Collection Capture All The Splendor Of Real Marble, Highlighting One Of The Wonders Offered By Nature And Provoking At The Very First Sight The Same Strong Emotional Impact Experienced. A Material Which Reclaims The Hand-chipped Authenticity Of Yore, Of The Fundamental Architecture That Gave Life And Character To Many A Medieval Square, Yet Which Reinvents Itself With*




# THE EVOLUTION OF CERAMIC SURFACE

A material so innovative that it breaks down the barriers between surfaces for architecture & furnishing. Strength plus lightness, different sizes make floors, walls, furnishings and finishings. Not just surfaces.



Wear resistant

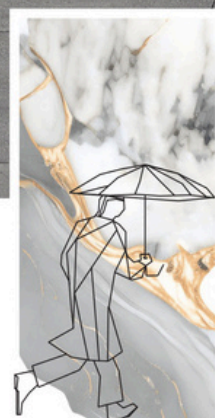

Weather proof



Fully customizable



Stain resistant



# A COMPLETE PRODUCT SYSTEM



**GOLD  
Endless**  
*Collection*

The finest raw materials,  
cutting-edge ceramic tile  
technology and the  
commitment to excellence  
show.

*Modern*  
**Elegance**

AVAILABLE DESIGN



# Anything is possible!



Our Product System Is Designed  
To Create Complete, Coordinated  
Interiors And Exteriors. With Our  
Brands We Offer a Stylistic Selection  
Of Functional Surfaces And Products  
For Every Space.



[www.satilesanddecor.com.au](http://www.satilesanddecor.com.au)



[sales@satilesanddecor.com.au](mailto:sales@satilesanddecor.com.au)



*Gold Endless*  
Collection

**SA** TILES  
AND  
DECOR  
EXCELLENCE IN TILING & BATHWARE

# AOTOMOS GOLD

SIZE : 60x120cm

RANDOM : 03







● **AOTOMOS GOLD**






# Gold Endless Collection

**SA** TILES  
AND  
DECOR  
EXCELLENCE IN TILING & BATHWARE

## LEVISH GOLD

SIZE : 60x120cm

RANDOM : 03

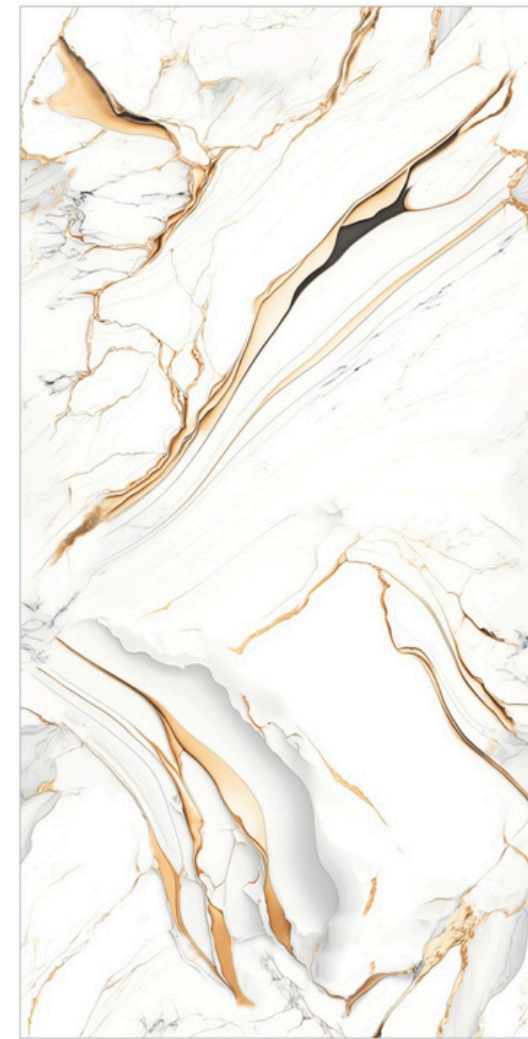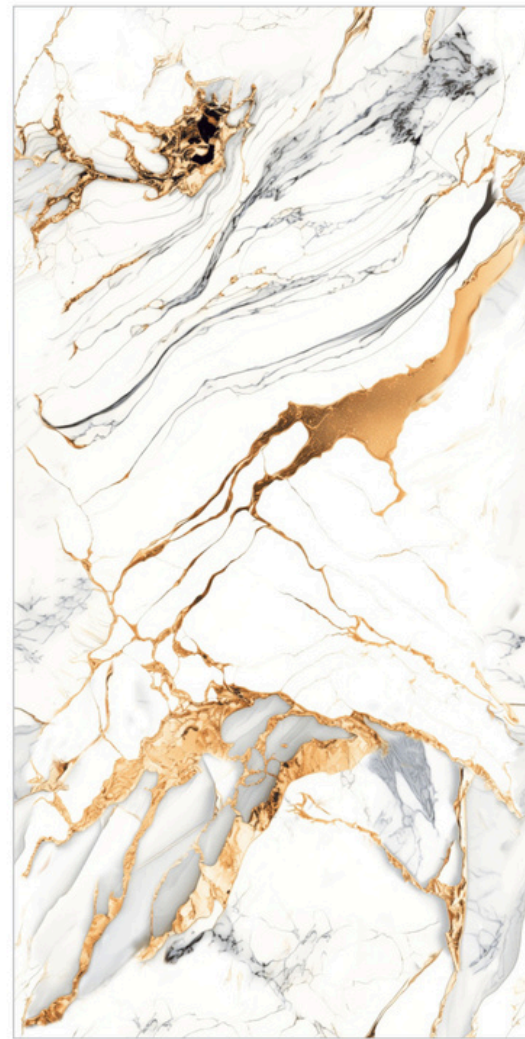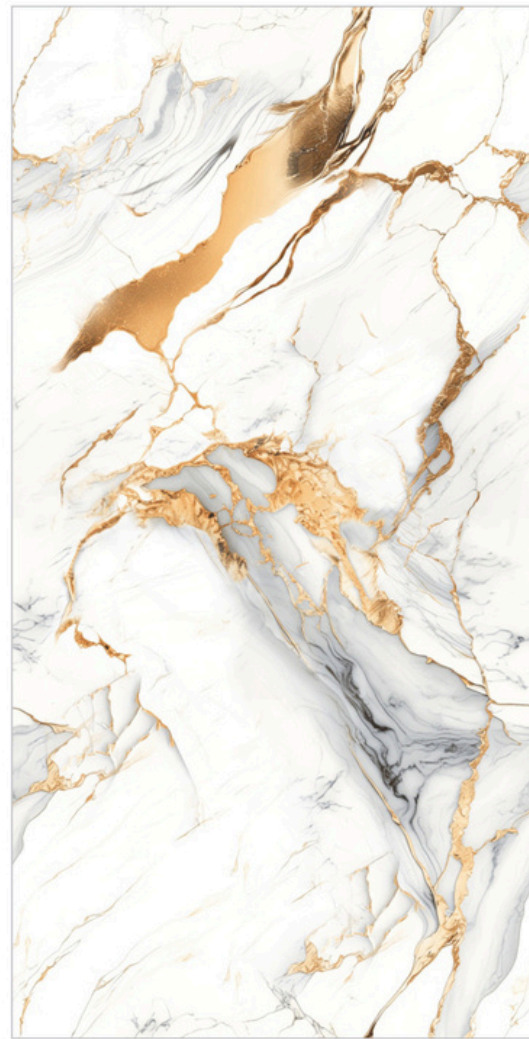





● **LEVISH GOLD**



# Gold Endless Collection

## OSPREAY GOLD

SIZE : 60x120cm

RANDOM : 01







● **OSPREAY GOLD**






# Gold Endless

Collection

## ELEGANT GOLD

SIZE : 60x120cm

RANDOM : 03

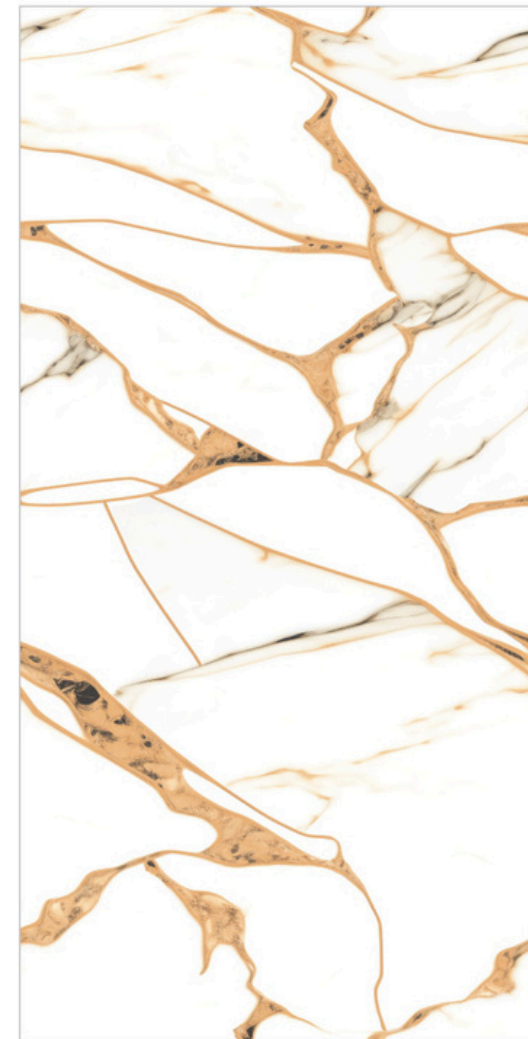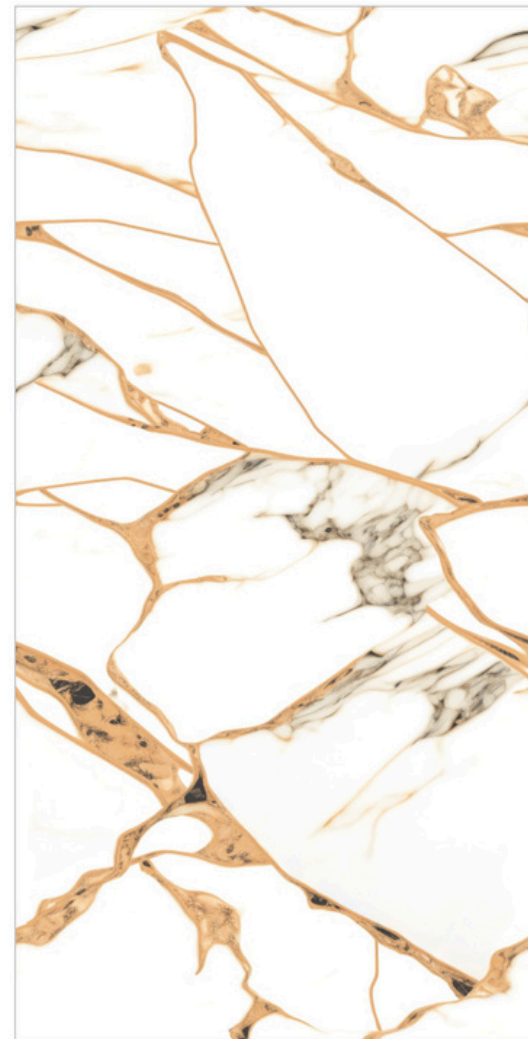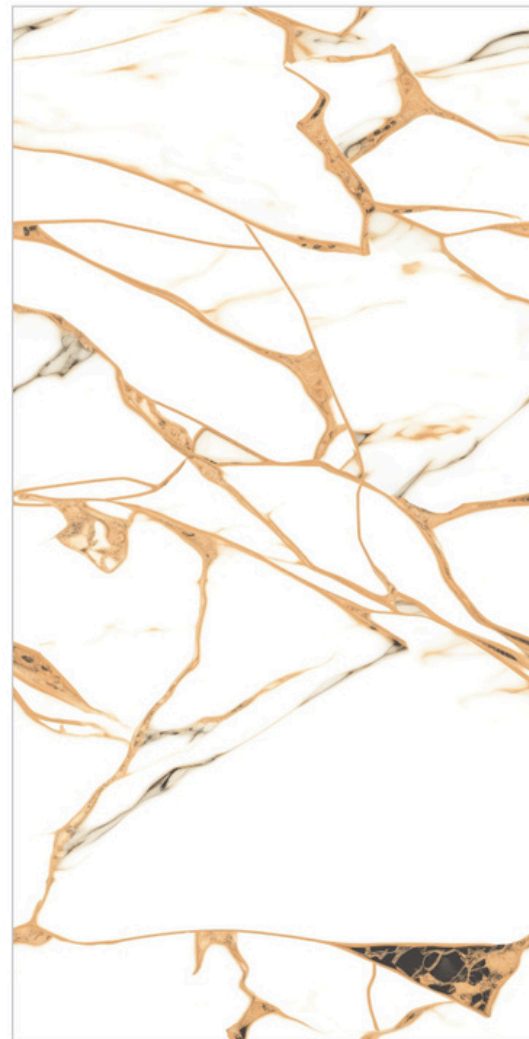





● **ELEGANT GOLD**




# Gold Endless

Collection

## HARVEST GOLD

SIZE : 60x120cm

RANDOM : 03

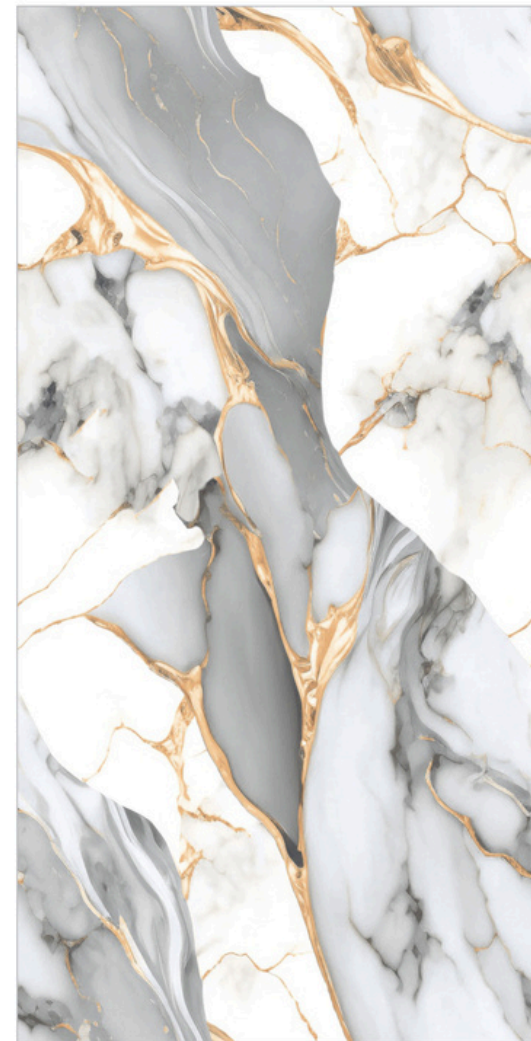





● **HARVEST GOLD**



# Gold Endless


Collection

**SA** TILES  
AND  
DECOR  
EXCELLENCE IN TILING & BATHWARE

## LIQUID GOLD

SIZE : 60x120cm

RANDOM : 03

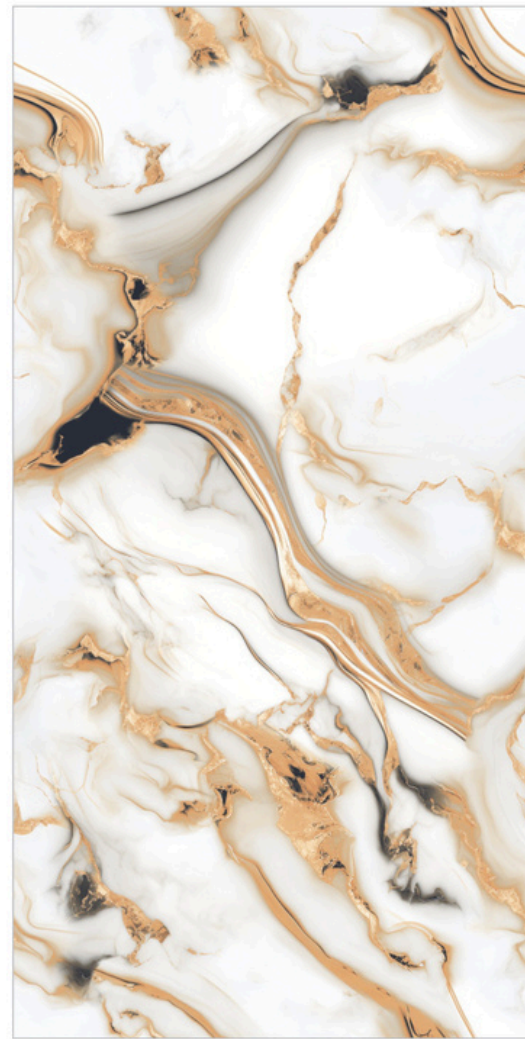





● **LIQUID GOLD**



# Gold Endless

Collection

## ORBITO GOLD

SIZE : 60x120cm

RANDOM : 03







● **ORBITO GOLD**



# Gold Endless

Collection

## SUZLON GOLD

SIZE : 60x120cm

RANDOM : 03







● **SUZLON** GOLD





# Gold Endless

Collection

## VALENZA GOLD

SIZE : 60x120cm

RANDOM : 03

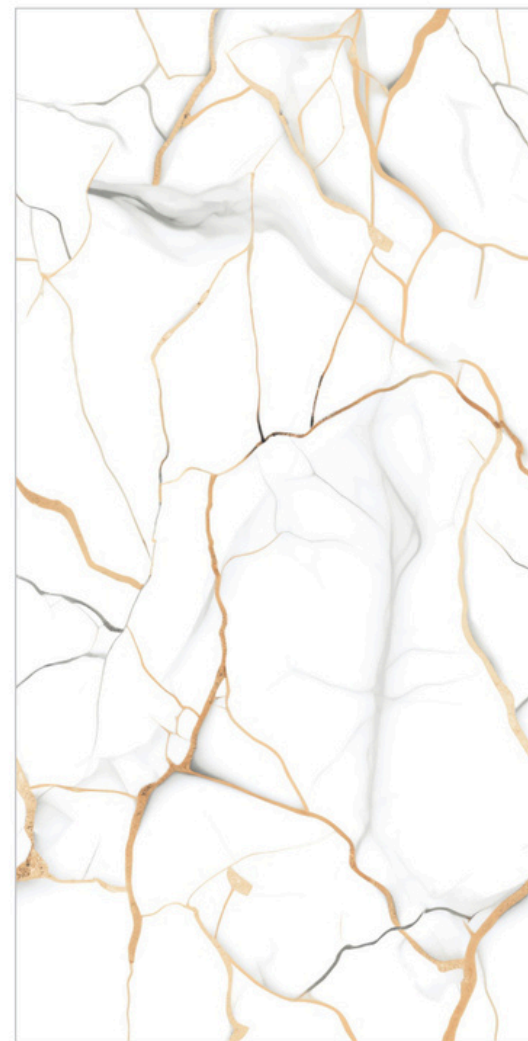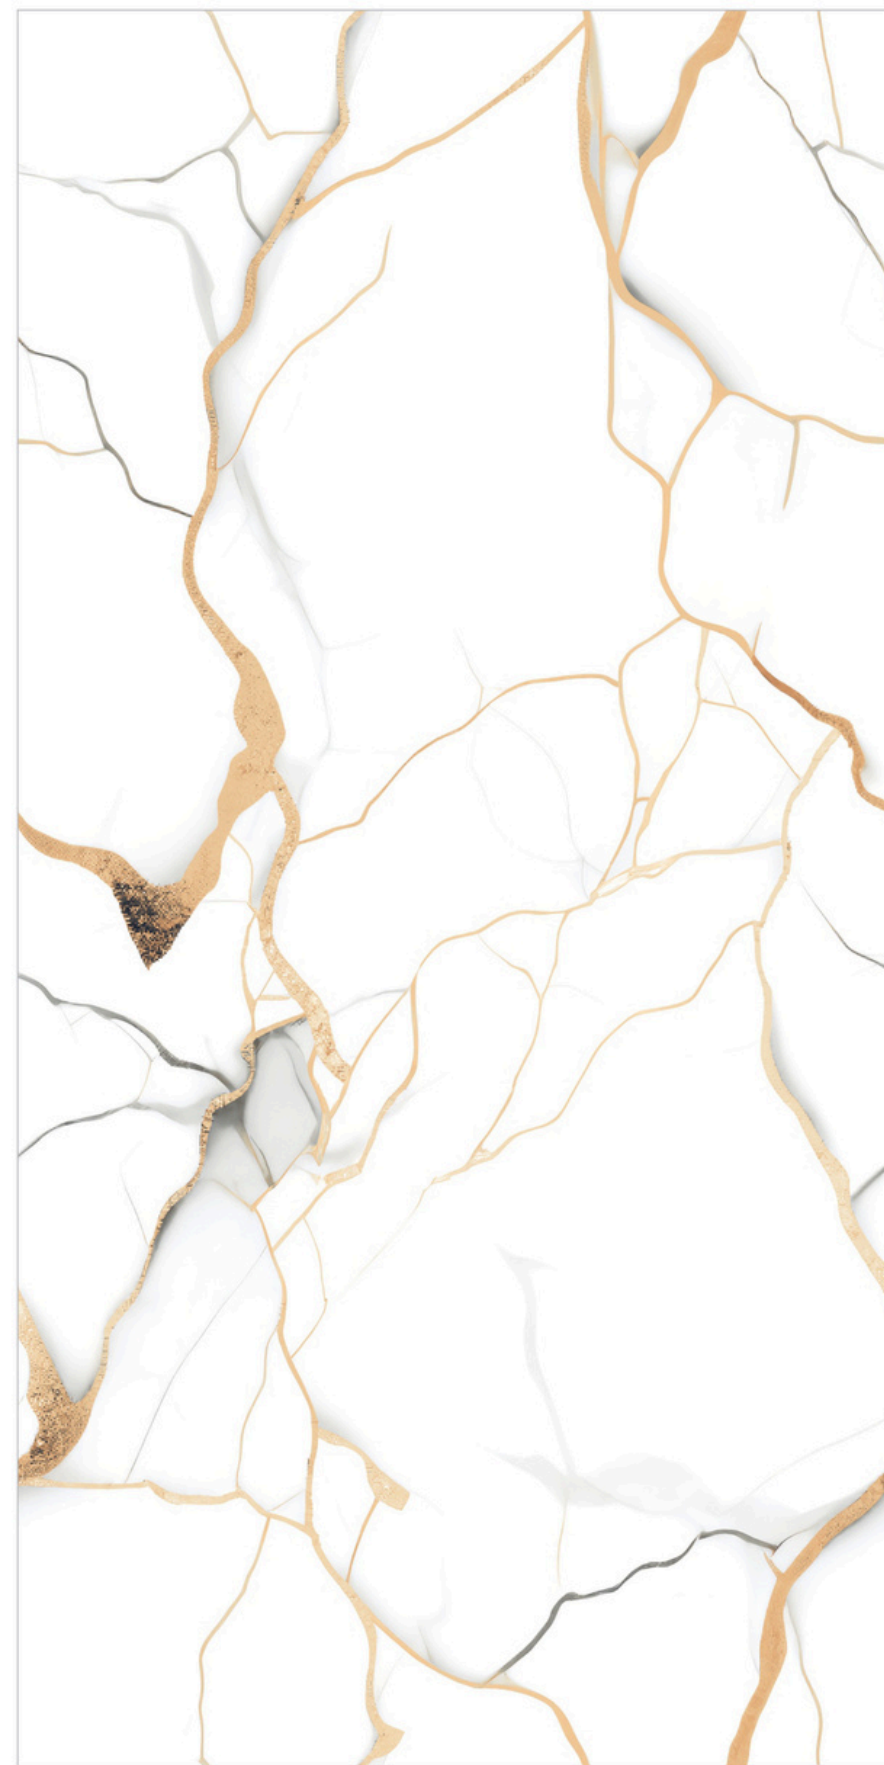





● **VALENZA** GOLD



# Technical Specifications.

| CHARACTERISTIC                            | STANDARD AS PER<br>ISO-13006/EN 14411<br>GROUP Bla | MEAN VALUE OF<br>ITACON<br>POLISHED GVT | MEAN VALUE OF<br>ITACON<br>GVT / PGVT | TEST METHOD  |
|-------------------------------------------|----------------------------------------------------|-----------------------------------------|---------------------------------------|--------------|
| <b>REGULATORY PROPERTIES</b>              |                                                    |                                         |                                       |              |
| Deviation in length & width               | ±0.5 %                                             | ±0.1 %                                  | ±0.1 %                                | ISO-10545-2  |
| Deviation in thickness                    | ±5.0 %                                             | ±4.0 %                                  | ±4.0 %                                | ISO-10545-2  |
| Straightness in side                      | ±0.5 %                                             | ±0.1 %                                  | ±0.1 %                                | ISO-10545-2  |
| Rectangularity                            | ±0.5 %                                             | ±0.1 %                                  | ±0.1 %                                | ISO-10545-2  |
| Surface flatness                          | ±0.5 %                                             | ±0.2 %                                  | ±0.2 %                                | ISO-10545-2  |
| Color dierence                            | Unaltered                                          | No change                               | No change                             | ISO-10545-16 |
| Glossiness                                | As per mfg                                         | Min 90%                                 | Min 4%                                | GLOSSOMETER  |
| <b>STRUCTURAL PROPERTIES</b>              |                                                    |                                         |                                       |              |
| Water absorption                          | < 0.50 %                                           | < 0.20 %                                | < 0.20 %                              | ISO-10545-3  |
| Apparent density                          | > 2.0 g/cc                                         | >2.10 g/cc                              | >2.10 g/cc                            | DIN 51082    |
| <b>MASSIVE MECHANICAL PROPERTIES</b>      |                                                    |                                         |                                       |              |
| Modulus Of Rupture                        | Min. 35 N/mm <sup>2</sup>                          | Min. 40 N/mm <sup>2</sup>               | Min. 40 N/mm <sup>2</sup>             | ISO-10545-4  |
| Breaking strength                         | Min. 1300 N                                        | Min. 2000 N                             | Min. 2000 N                           | ISO-10545-4  |
| Impact resistance                         | As per mfg                                         | Min. 0.55                               | Min. 0.55                             | ISO-10545-5  |
| <b>SURFACE MECHANICAL PROPERTIES</b>      |                                                    |                                         |                                       |              |
| Surface abrasion resistance               | As per mfg                                         | Min. Class-3                            | Min. Class-4                          | ISO-10545-7  |
| MOH's hardness                            | As per mfg                                         | Min. 4                                  | Min. 5                                | EN 101       |
| <b>THERMO HYDROMETRIC PROPERTIES</b>      |                                                    |                                         |                                       |              |
| Frost resistance                          | No damage                                          | No damage                               | No damage                             | ISO-10545-12 |
| Thermal shock resistance                  | No damage                                          | No damage                               | No damage                             | ISO-10545-9  |
| Moisture expansion                        | Nil                                                | Nil                                     | Nil                                   | ISO-10545-10 |
| Thermal expansion (COE)                   | Max. 9.0 x 10 <sup>-6</sup>                        | Max. 6.5x10 <sup>-6</sup>               | Max. 6.5 x 10 <sup>-6</sup>           | ISO-10545-8  |
| Crazing resistance                        | As per mfg.                                        | Min. 10 Cycle                           | Min. 10 Cycle                         | ISO-10545-11 |
| <b>CHEMICAL PROPERTIES</b>                |                                                    |                                         |                                       |              |
| Chemical resistance                       | No damage                                          | No damage                               | No damage                             | ISO-10545-13 |
| Stain resistance                          | Resistant                                          | Resistant                               | Resistant                             | ISO-10545-14 |
| <b>SAFETY PROPERTIES</b>                  |                                                    |                                         |                                       |              |
| Slip resistance                           | As per mfg.                                        | >0.40                                   | >0.40                                 | ISO-10545-17 |
| Fire resistance                           | As per mfg.                                        | Fire proof                              | Fire proof                            | N. A.        |
| Lead & Cadmium given o<br>by glazed tiles | As per mfg.                                        | Does not yield<br>Pb & Cd               | Does not yield<br>Pb & Cd             | ISO-10545-15 |