

**COLLECTION-2025** 

## About Us.

Jalaram Ceramics Limited, a leading manufacturer of Ceramic Wall & Floor, & Vitrified Floor Tiles in India, having successful track record of over Three Decades to its credit, Employing the latest International Technology & Fully Automated, Single Fired State-of-Art Plant & Machinery from HLT, KEDA Press, B&T, Welco, Simec & Technofarrari & Material Handling Systems from TGV (Auto Guided Vehicles) of Italy offering World Class Ceramic, Vitrified Tiles of Unmatched Quality.

At JCL, "Quality" is not just a Statement but also the way of life. With our expansion plans we Have added technological excellence to our credit by establishing various Tiles Plants with increased Capacities. We manufacture our tiles under ISO 14001:2005 quality control systems to make each tile Meet the international Standards.

Needless to say, to deliver what we commit, we use the best combination of high quality, high grade raw material imported from the best sources world over.

The company's culture has become pervading that it has become ingrained in every aspect of JCL's ethos and has resolutely and aggressively paved the way in to the future.


A full-fledged team of dedicated professional- qualified, versatile and committed supports its Exacting standards of excellence.

With ongoing training, R&D and human resource development, the company continuously strives To Bring International Quality Consistently surpassing itself and always reaching a higher peak.

We Believe in Integrity in business means honestly caring about giving customers the Best of product Quality, Value for Money and Services. Focus, Synergy and Commitment has been The Inspiration and The Driving Force in JCI's Relentless march.



Armani Brown.



Armani Crema.




PLAIN =



Glims Grey Dark.



Glims Grey.


















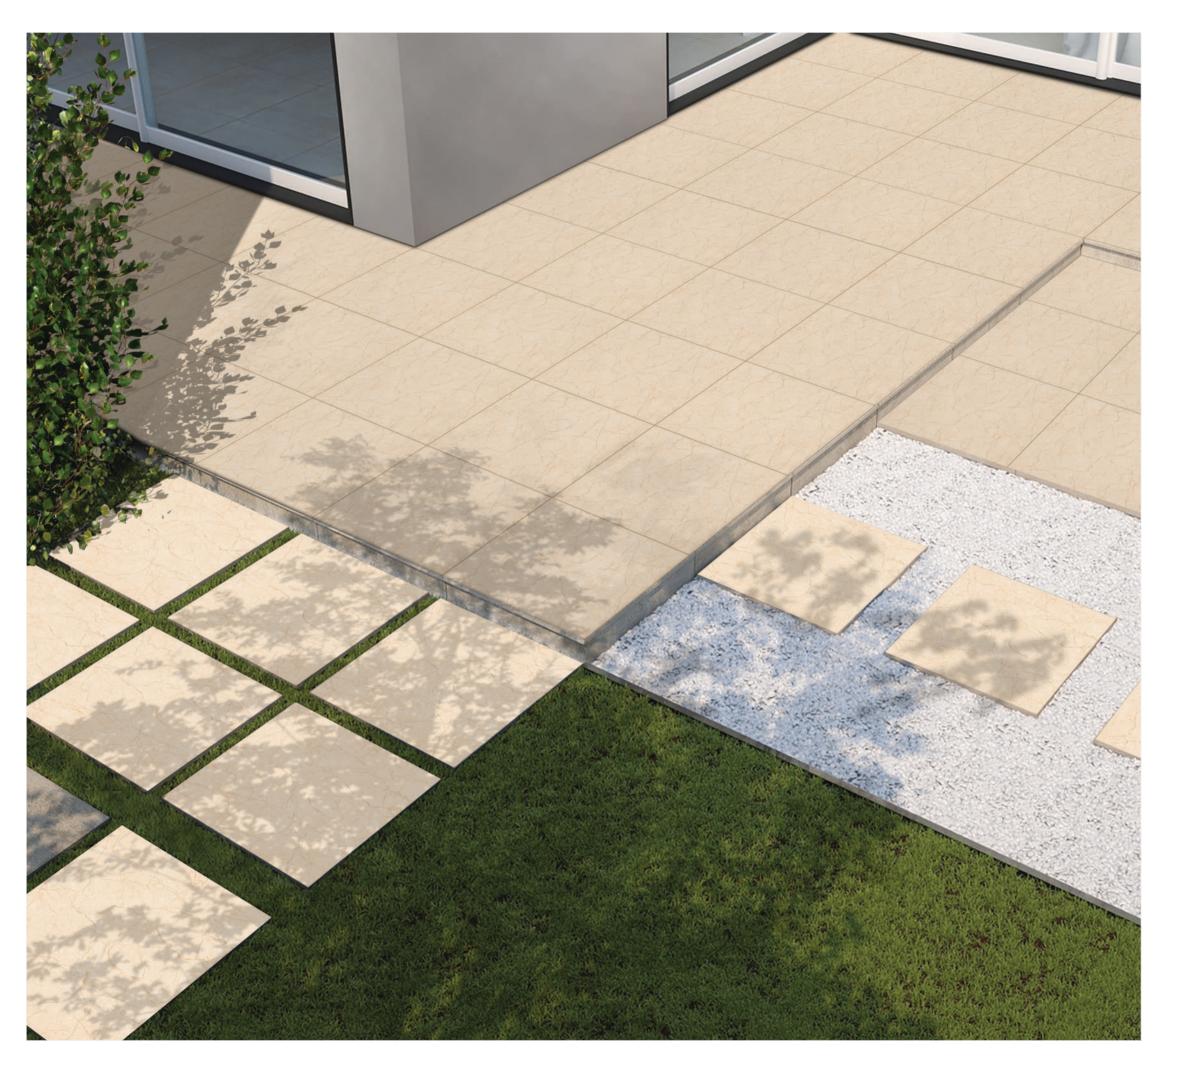








Let your space embrace **BEAUTY.** 

Phoenix Crema.



### Omani Beige.








Purgo Wood.



Omani Brown.


























Let your space embrace **CHARM**.

Phoenix Brown.



#### Mistry Crema.








French White.



Plain White.

























Let your space embrace **NATURE.** 

Breccia.












Let your space embrace **SHINE**.

Carpet Wood.



Liso Crema.

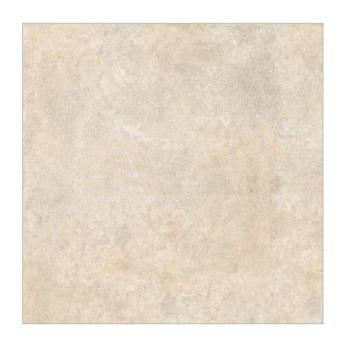

Liso Marfil.







Liso Brown.



Liso Champ.























Let your space embrace **CHARISMA**.

Panama.



Ganulato Bianco.



Ganulato Grey.



RUSTIC =
PUNCH



Piano Wood.



Piano Wood Multy.

























Let your space embrace **AURORA**.

Fusion White.



Baleno Grey.



Baleno White.








Opera White.



Rock Silver.

























Let your space embrace **ECSTACY**.


Rock Grey.



Diana Crema.



Oyster Crema.







Oyster Brown.



Oyster Moka.

















#### Iris Wood.







Alix Wood.



Wood Frame.

















#### Performance.





## Application.



Airport



Toilets



High Terminal Shock Withstand Capability From -50°c To +60°c



Stain Proof



IT Parks & Software Building



Super Specialty Hospitals



High Breaking Strength



High Density



Railway Stations



Hi-Tech Building Areas



Lowest Water Absorption <0.06%



Chemical And Acid Resistant



Swimming Pools



Show Rooms

## **Digital Packing Details.**

Size	Packing	Coverage Area	Thickness	Tiles Wt.
400x	Five (5)	0.80sq.mtr /	7.5mm	11.5kg
400mm	pcs.	8.61sq. ft	Approx	Approx

# **Technical Specifications.**

No.	Property	National STD 18006/EN 176 Group BLA	Vitrified Tiles Value	Method of Testing
1.	Deviation in Length	0.6%	0.1%	EN 98
2.	Deviation in Thickness	5%	4%	EN 98
3.	Strength of Sides	0.5%	0.1%	EN 98
4.	Rectangularity	0.6%	0.2%	EN 98
5.	Surface Flatness	0.5%	0.3%	EN 98
6.	Water Absorption*	<0.5%	<1.5%	EN 99
7.	Mohs Hardness*	>6	>7	EN 101
8.	Flexural Straightness*	>27N/MM	>47N/MM	EN 100
9.	Abrasion Resistance	<204MM	<98MM	EN 102
10.	Skid Resistance	>0.4	>0.6	Astmc C-1028
	(Friction Coefficient)			
11.	Breaking Strength	>1113N	>2830N	Astmc C-648
12.	Density (G/CC)	>2	>2.4	Din 51082
13.	Frost Resistance	Frost Proof	Frost Proof	En 202
14.	Chemical Resistance	No Damage	No Damage	En 106
15.	Thermal Shock Resistance	No Damage	No Damage	En 104
16.	Color Resistance	No Damage	No Damage	Din 51094
17.	Thermal Expansion	<9x 10.6	<6x 10.6	En 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Resistance	Nil	Nil	ISO 10545-10
20.	Glossiness	-	Min 65% - 70% Reflection	Glossmeter

<sup>\*</sup>Applicable to First Quality only